








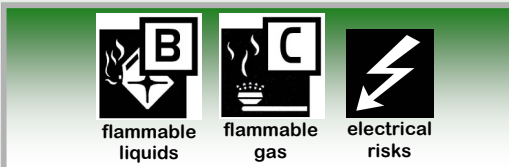


FBA-G4 4 kg Clean Agent Gas
FBA-G6 6 kg Clean Agent Gas

**Ozone Friendly Automatic
Fire Suppression Units**



-  Clean agent gas (Halon replacement)
-  Zero ozone depletion
-  Manufacturer's 5 year warranty
-  Does not leave any residue
-  Non corrosive – No thermal shock
-  Suitable for B & C class fires
-  Safe for use on electrical equipment
-  Brass valve - Easy to read pressure gauge
-  Supplied with ceiling mounting bracket

Used to protect machinery / plant and where there is a risk of fire such as in boat / engine bays, flammable products storage areas. Ideal for use in sensitive locations and are a suitable option to protect high-value assets such as precious items storage, computing technology and telecommunications facilities.
The unit required is determined by the gross volume of that compartment. Only one unit should be installed in any one compartment and should provide the total protection required for that compartment.

Model	FBA-G4	FBA-G6
Capacity	4 kg	6 kg
Total Weight	6.7 kg	9 kg
Total Height	295 mm	305 mm
Total Width (incl. bracket)	270 mm	300 mm
Working Temp.	-30 ^o to +60 ^o C	-30 ^o to +60 ^o C
Discharge Time / Temp.	Under 10 secs @ 79 ^o C ± 5 ^o C	Under 10 secs @ 79 ^o C ± 5 ^o C
Maximum Volume Protected	6.8 m³	10.2 m³
Operating Pressure	12 bar @ 20 ^o C	12 bar @ 20 ^o C
Minimum Burst Pressure	55 bar	55 bar
Qty Per Carton	1	1
Carton Dimensions	29x29x 34 cm	32x31x35 cm
Carton Volume	0.029 m ³	0.035 m ³
Carton Weight	7.25 kg	9.6 kg
Qty Extinguisher per Pallet	48	48
Pallet Dimensions	120x100x136 cm	120x100x140 cm
Pallet Volume	1.632 m ³	1.680 m ³
Pallet Gross Weight	370 kg	481 kg

FBA-G4 provides protection for a maximum enclosed volume of **6.8m³**
FBA-G6 provides protection for a maximum enclosed volume of **10.2m³**